

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/114306 A1

(51) International Patent Classification⁷: **G11B 20/12**,
20/18

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(21) International Application Number:
PCT/IB2004/050930

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03101837.7 23 June 2003 (23.06.2003) EP

(71) Applicant (for all designated States except US): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BLACQUIERE,**
Johannis, F., R. [NL/NL]; c/o Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL). **IJTSMA, Pope** [NL/NL];
c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
HAMELINCK, Dirk [BE/BE]; c/o Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL).

(74) Agent: **UITTENBOGAARD, Frank**; Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA,
SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,
IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,
SN, TD, TG)

Published:

— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR RECORDING INFORMATION

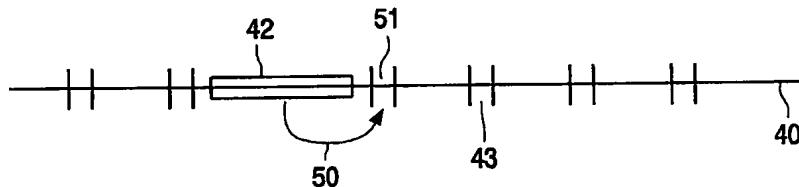

(57) Abstract: A device for recording records a series of blocks (42) having continuous logical addresses, e.g. digitally encoded video, on a record carrier at a corresponding physical address range. Some physical addresses are assigned to defect management areas (43). The logical addresses are translated into the physical addresses in dependence of the defect management information. The device has contiguous recording means for detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area. If so, the subset of physical addresses is reallocated to the user data area. The series of blocks (42) is contiguously recorded extending over the subset of physical addresses. The defect management area may be eliminated, shifted to a new location (51) after the end of the recorded file or shifted to the end of the medium.

WO 2004/114306 A1

Device and method for recording information

The invention relates to a device for recording information in blocks having logical addresses on a record carrier.

The invention further relates to a method of recording information in blocks having logical addresses in a track on a record carrier.

5 The invention further relates to a computer program product for recording information.

The invention relates to the field of defect management in recording systems, and in particular to defect management when recording real-time information such as video.

10

A device and method for recording information on a record carrier are known from US 5,956,309. The apparatus has recording means for recording the information in information blocks having logical addresses on an optical disc in a track at allocated physical addresses. The logical addresses constitute a contiguous storage space. In practice, the record
15 carrier may exhibit defective parts of the track, in particular a defect preventing a block to be recorded at a specific physical address. These defects might be caused by scratches, dust, fingerprints and so on. Initially, before any user data is recorded, defects are detected, and physical addresses of defective sectors are removed from use in a defect table, a process usually called slipping. In the event of defects detected during use of the record carrier,
20 logical addresses assigned to defective physical addresses are assigned to different physical addresses in a defect management area, a process usually called remapping or linear replacement. Remapping introduces a performance penalty as remapping introduces a movement of the recording head (for example an optical pickup unit, OPU), and possibly also a medium rotational speed adjustment and rotational delay(s). Hence defect management
25 areas are located distributed over the total recording area to reduce jumping distances. A problem of the known system is that when a series of blocks is to be recorded that has a large continuous range of logical addresses, the corresponding range of physical addresses may extend over one or more defect management areas. Hence during recording and reproducing

the continuous range of logical addresses the optical head has to jump across the defect management areas.

5 It is an object of the invention to provide a system for contiguously recording and reproducing a series of blocks of digital information, which provides defect management while reducing movements of the head.

 For this purpose, the device as described in the opening paragraph comprises recording means for recording marks in a track on the record carrier representing the
10 information, control means for controlling the recording by locating each block at a physical address in the track, physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, the control means comprising addressing means for translating the logical
15 addresses into the physical addresses and vice versa in dependence of defect management information, defect management means for detecting defects and maintaining the defect management information in the defect management areas, the defect management
20 information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area, and contiguous recording means for recording a series
25 of blocks having a continuous logical address range in a corresponding allocated physical address range, in particular digitally encoded video, for detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area, for reallocating the subset of physical addresses to the user data area, and for contiguously recording the series of blocks extending over the subset of physical addresses.

 For this purpose, the method as described in the opening paragraph is for recording information in blocks having logical addresses located at physical addresses in a track on a record carrier, the logical addresses corresponding to the physical addresses in dependence of defect management information, physical addresses in first parts of the track
30 being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, defects being detected and the defect management information being maintained in the defect management areas, and the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate

physical address in a defect management area, a series of blocks having a continuous logical address range, in particular digitally encoded video, corresponding to an allocated physical address range, the method comprising detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area,
5 reallocating the subset of physical addresses to the user data area, and contiguously recording the series of blocks extending over the subset of physical addresses.

The measures have the effect that defect management areas which would interrupt large files of recorded data, are dynamically moved to a different physical address range. This has the advantage that the large files are stored more contiguously and no jumps
10 are required to skip defect management areas.

The invention is also based on the following recognition. Optical media in general have quite a reasonable data-rate, but the access performance (jumping over the disc) is rather limited. Hence for writing a file to the medium as fast as possible (and reading the same file later on) it is preferred to write (read) the file physically contiguous to the medium.
15 An application accessing the record carrier via a usual (host) interface can only influence logical addresses of the medium to which blocks of the file should be written. In order to get a large file as fast as possible to a medium the application may assign a large continuous logical address space. In the recording device (drive) the continuous logical address space is mapped on the physical address space of the medium. In general this mapping is rather
20 straight forward (e.g. something like a 1-to-1 mapping), but defects and defect management areas will interrupt the allocated physical address range. Defects necessarily have to be accommodated by the defect management system. The inventors have seen that for such contiguous recording the defect management areas itself can be removed from the allocated physical address range, obviating the need to jump across defect management areas.

25 In an embodiment of the device the contiguous recording means are for reallocating said interrupting defect management area to different physical addresses and updating the defect management information correspondingly. The interrupting defect management area is moved to a new location, e.g. shifted forward to the end of the contiguously recorded file or to the end of the medium. This has the advantage that the total
30 available defect management areas are not changed, and the file system accessing the medium via the recording device does not need to be informed of any changed data.

In an embodiment of the device the contiguous recording means are for at least partly removing said interrupting defect management area from the defect management areas. This has the advantage that more storage space becomes available for recording user data.

For example the defect management system may initially assign a relatively large amount of physical addresses to defect management areas to accommodate a worst case medium, while during use the medium proves to have only average or less than average defects.

Further embodiments are given in the dependent claims.

5

These and other aspects of the invention will be apparent from and elucidated further with reference to the embodiments described by way of example in the following description and with reference to the accompanying drawings, in which

Figure 1a shows a record carrier (top view),
10 Figure 1b shows a record carrier (cross section),
Figure 2 shows a recording device,
Figure 3 shows remapping of defective locations,
Figure 4 shows distributed defect management areas,
Figure 5 shows contiguous recording,
15 Figure 6 shows shifting a defect management area,
Figure 7 shows shifting a defect management area to the end of the medium,
and

Figure 8 shows a method of dynamically moving defect management areas.
Corresponding elements in different Figures have identical reference
20 numerals.

Figure 1a shows a disc-shaped record carrier 11 having a track 9 and a central hole 10. The track 9, being the position of the series of (to be) recorded marks representing
25 information, is arranged in accordance with a spiral pattern of turns constituting substantially parallel tracks on an information layer. The record carrier may be optically readable, called an optical disc, and has an information layer of a recordable type. Examples of a recordable disc are the CD-R and CD-RW, and writable versions of DVD, such as DVD+RW, and the high density writable optical disc using blue lasers, called Blu-ray Disc (BD). Further details
30 about the DVD disc can be found in reference: *ECMA-267: 120 mm DVD – Read-Only Disc - (1997)*. The information is represented on the information layer by recording optically detectable marks along the track, e.g. crystalline or amorphous marks in phase change material. The track 9 on the recordable type of record carrier is indicated by a pre-embossed track structure provided during manufacture of the blank record carrier. The track structure is

constituted, for example, by a pregroove 14 which enables a read/write head to follow the track during scanning. The track structure comprises position information including so-called physical addresses, for indicating the location of units of information, usually called information blocks. The position information includes specific synchronizing marks for
5 locating the start of such information blocks.

Figure 1b is a cross-section taken along the line b-b of the record carrier 11 of the recordable type, in which a transparent substrate 15 is provided with a recording layer 16 and a protective layer 17. The protective layer 17 may comprise a further substrate layer, for example as in DVD where the recording layer is at a 0.6 mm substrate and a further substrate
10 of 0.6 mm is bonded to the back side thereof. The pregroove 14 may be implemented as an indentation or an elevation of the substrate 15 material, or as a material property deviating from its surroundings.

The record carrier 11 is intended for carrying digital information in blocks under control of a file management system, the information including real-time information
15 to be recorded and reproduced continuously, in particular information representing digitally encoded video according to a standardized format like MPEG2.

Figure 2 shows a recording device for writing information on a record carrier 11 of a type which is writable or re-writable, for example CD-R or CD-RW, or DVD+RW or BD. The device is provided with recording means for scanning the track on the record carrier
20 which means include a drive unit 21 for rotating the record carrier 11, a head 22, a positioning unit 25 for coarsely positioning the head 22 in the radial direction on the track, and a control unit 20. The head 22 comprises an optical system of a known type for generating a radiation beam 24 guided through optical elements focused to a radiation spot 23 on a track of the information layer of the record carrier. The radiation beam 24 is generated
25 by a radiation source, e.g. a laser diode. The head further comprises (not shown) a focusing actuator for moving the focus of the radiation beam 24 along the optical axis of said beam and a tracking actuator for fine positioning the spot 23 in a radial direction on the center of the track. The tracking actuator may comprise coils for radially moving an optical element or may alternatively be arranged for changing the angle of a reflecting element. For writing
30 information the radiation is controlled to create optically detectable marks in the recording layer. The marks may be in any optically readable form, e.g. in the form of areas with a reflection coefficient different from their surroundings, obtained when recording in materials such as dye, alloy or phase change material, or in the form of areas with a direction of magnetization different from their surroundings, obtained when recording in magneto-optical

material. For reading the radiation reflected by the information layer is detected by a detector of a usual type, e.g. a four-quadrant diode, in the head 22 for generating a read signal and further detector signals including a tracking error and a focusing error signal for controlling said tracking and focusing actuators. The read signal is processed by read processing unit 30 of a usual type including a demodulator, deformatter and output unit to retrieve the information. Hence retrieving means for reading information include the drive unit 21, the head 22, the positioning unit 25 and the read processing unit 30. The device comprises write processing means for processing the input information to generate a write signal to drive the head 22, which means comprise an input unit 27, and modulator means comprising a formatter 28 and a modulator 29. During the writing operation, marks representing the information are formed on the record carrier. The marks are formed by means of the spot 23 generated on the recording layer via the beam 24 of electromagnetic radiation, usually from a laser diode. Writing and reading of information for recording on optical disks and formatting, error correcting and channel coding rules are well-known in the art, e.g. from the CD and DVD system.

The control unit 20 is connected via control lines 26, e.g. a system bus, to said input unit 27, formatter 28 and modulator 29, to the read processing unit 30, and to the drive unit 21, and the positioning unit 25. The control unit 20 comprises control circuitry, for example a microprocessor, a program memory and control gates, for performing the procedures and functions according to the invention as described below. The control unit 20 may also be implemented as a state machine in logic circuits. The control unit 20 controls the recording and retrieving of information and may be arranged for receiving commands from a user or from a host computer.

The input unit 27 processes the audio and/or video to units of information, which are passed to the formatter 28 for adding control data and formatting the data as information blocks according to a predefined recording format, e.g. by adding error correction codes (ECC) and/or interleaving. For computer applications units of information may be interfaced to the formatter 28 directly. The formatted data from the output of the formatter 28 is passed to the modulation unit 29, which comprises for example a channel coder, for generating a modulated signal which drives the head 22. Further the modulation unit 29 comprises synchronizing means for including synchronizing patterns in the modulated signal. The formatted units presented to the input of the modulation unit 29 comprise address information and are written to corresponding addressable locations on the

record carrier under the control of control unit 20, and for performing defect management as described below.

In an embodiment the input unit 27 is arranged for receiving real-time information. The input unit may comprise compression means for input signals such as analog audio and/or video, or digital uncompressed audio/video. Suitable compression means are described for audio in WO 98/16014-A1 (PHN 16452), and for video in the MPEG2 standard. The input signal may alternatively be already digitally encoded.

The control unit 20 is arranged for controlling the recording by locating each block at a physical address in the track, and includes the following cooperating units: an addressing unit 31, a defect management unit 32, a contiguous recording unit 33, and (optionally) a memory 34.

The addressing unit 31 is for translating physical addresses into logical addresses and vice versa in dependence of defect management information. The logical addresses constitute a contiguous storage space to be used for storing files of information blocks under control of a file management system, for example UDF. The defect management unit 32 detects defects, for example by monitoring the signal quality of a read-out signal from the head 22 during recording and/or reading. The defects may also be detected by determining an error rate in retrieved information blocks. The defect management unit further maintains the defect management information in defect management areas on the record carrier, for example in defect lists as defined for the DVD recordable systems like DVD+RW. The defect management information at least includes remapping information.

In an embodiment the recording device is arranged as a drive unit to be connected to a separate host system, for example a drive unit to be build in a PC. The control unit 20 is arranged to communicate with a processing unit in the host system via a standardized interface. Alternatively the recording drive is arranged as a stand alone unit, for example a video recording apparatus for consumer use. The control unit 20, or an additional host control unit included in the device, is arranged to be controlled directly by the user, and to also perform the functions of the file management system.

Figure 3 shows remapping of defective locations. A physical address space 40 is schematically represented by a horizontal line. A series of blocks 42 is to be recorded in an allocated physical address range 39. However a defect 41 interrupts the allocated physical address range. Remapping 45 is the process that a block 44 having a logical address corresponding to the physical address 41 that is defective is stored in an alternative physical

address in a defect management spare area (DMA) 43. The remapping information provides data for translating the logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area, for example an entry in a secondary defect list including the logical address of the remapped block and its
5 corresponding physical address. Alternatively remapping information may include data for translation of a physical address of a defect to a different physical address in a defect management area.

The contiguous recording unit 33 in Figure 2 performs the following functions. First it is detected that a series of blocks having a continuous logical address range
10 is to be recorded in a corresponding allocated physical address range. In general contiguous recording is required for real-time information which has a relative high data rate, in particular video information. The type of data may be included in the writing commands received by the control unit, for example a write command from a host computer including a real-time bit. The detection of contiguous recording may also be based on the amount of data
15 blocks indicated in a write command, or by other aspects such as the fact that new blocks having logical addresses consecutive to the last written block arrive at regular intervals.

Figure 4 shows distributed defect management areas. A physical address space
40 is schematically represented by a horizontal line. First parts of the physical address space are assigned to defect management areas (DMA) 43,46 and second parts of the physical address space are assigned to user data areas 47,48, i.e. are assigned to logical addresses available for storing user data. An example is the Mount Rainier defect management as defined for CD-MRW. A description of Mount Rainier and CD-MRW is available from Philips on <http://www.licensing.philips.com/information/mtr/>. In the logical space of the medium the DMAs are not visible. This means that if a large file is written to disc even if the
20 entire file has continuous logical addresses, there will be DMAs included in the physical address allocated to the file. These DMAs in the middle of such a data file harm the performance of writing and consequent reading back of the file, as there are a number of jumps introduced when the entire file is written (retrieved) due to the jumping over the DMAs. The solution is to move the interrupting DMA to different physical addresses. As a
25 result the large files are contiguous not only logically, but also physically on the medium.

Figure 5 shows contiguous recording. The physical address space is as shown in Figure 4. A series of blocks 42 constituting (part of) a large file is recorded starting in the user data area 48. However the series of blocks extends over the defect management area 46. The defect management area 46 covers a subset of physical addresses, which defect

management area is removed from the defect management areas. The subset of physical addresses originally assigned to the removed defect management area 46 are reallocated to user data area, and used for continuing the recording of the series of blocks 42.

Figure 6 shows shifting a defect management area. The physical address space and contiguously recorded data are as shown in Figure 5. The interrupting defect management area 46 has been shifted to a new location 51, as indicated by arrow 50. The new location 51 is constituted by physical address before the next defect management area. Hence the translation of logical addresses to physical addresses is unaffected after the next defect management area.

Figure 7 shows shifting a defect management area to the end of the medium. The physical address space and contiguously recorded data are as shown in Figure 5. The interrupting defect management area 46 has been shifted to a new location 61, as indicated by arrow 60. The new location 61 is constituted by physical address at the end of the medium, for example the last part of the last user data area. Effectively, when during the writing of a large file a DMA is reached, this DMA is shifted forward towards the end of the medium. The translation of logical addresses to physical addresses has to be adapted accordingly.

For relocating or removing a DMA it is required that any blocks already remapped and stored in that DMA are moved to a new location. When the DMA is still empty there is no problem and only the information about the location of this DMA needs to be updated. For example a pointer to the removed DMA has to be updated, or the status or size indicator for that DMA is changed to indicate that no space is available or space is available at a new physical address. If the location of the DMAs is not stored as a pointer somewhere on disc, but hard linked to a certain format, the location of the DMAs can't be changed. The solution is then to disable a certain DMA completely by making all entries in that particular DMA unusable. In most practical defect management systems the location of the DMAs is stored as a pointer somewhere on disc. For example for CD-MRW pointers and sizes of DMAs are stored in the MTA (Main Table Area), which consists of a MIP (Main Information Packet) and a MDT (Main Defect Table). The location pointer and possibly the size of the DMA have to be updated.

In an embodiment the device is provided with a memory 34, for example a cache coupled to the control unit 20. When the DMA that is to be removed is not empty (for example there are already replacements made to that DMA) there are inter alia the following three options.

- (1) Keep the data that has to be written to the location of the interrupting DMA for the time being in the cache. This data is written to disc at a later stage, e.g. in a background process active when no new real time data has to be recorded.
- (2) Read the data blocks of the interrupting DMA in cache and continue to write the new data (also extending over the 'old' DMA location). Of course the data of the DMA has to be written to disc after the write action is finished.
- (3) Use a piece of empty disc to store the amount of real-time data equal to the DMA size temporarily somewhere else. After the real-time operation is finished put the information that was at the DMA location at a new location, and finally retrieve the amount of data equal to the DMA from its temporary location and store it at the correct location. In an embodiment for drives that have no File System knowledge the temporary location could be an empty part of another DMA. Alternatively, if File System knowledge is available in the device, a free area could be (temporarily) allocated via the file system.

In an embodiment in either of the above options the device first detects which of the physical addresses in the DMA actually contain defect management information and need to be remapped. Temporarily storing and/or postponement of writing are applied only for the physical addresses that actually contain defect management data.

It is noted that the first option requires additional cache memory; the second option also requires additional cache memory and one small additional jump (over the size of a DMA); the third option doesn't need additional cache memory to store data in for a longer period of time, but does introduce two larger jumps (to and back from the free location). However, writing in any of these situations will typically not take any longer than it would have taken when the invention is not applied. The advantage of each of the options can be found in the increased performance when the large file is read back again. As reading a file is typically performed more often than writing that same file, the invention has a clear performance advantage.

In an embodiment the defect management system is adapted. If there are defects in the physical address range that is allocated to the contiguous series of blocks, the writing of the series is interrupted at the defect but continued immediately after the defect, effectively skipping the defective physical addresses. Logical addresses are assigned continuously by 'slipping' the defect. At the end of the file, the file doesn't fit in the allocated physical address range anymore (due to the 'slipped' defective addresses). The remainder of the file should be written at a free location on the medium. Preferably this is directly after the allocated physical address range, but it can be at any other free area at the cost of one extra

access. In an embodiment physical addresses containing defects detected interrupting the allocated physical address range are marked as being unusable, e.g. defect or already taken. In fact the defects may, at least partly, take the required space from the originally removed DMA. Hence no additional space is used from the user data area. Of course any previously remapped blocks in the removed DMA still need to be accommodated as described above.

5 Another solution could be to apply 'slipping' as described above and to get the extra-required space from the next DMA. This means that all data between the assigned area for the file and the next DMA has to be shifted over a distance corresponding to the number of defects that is in the allocated physical address range.

10 In an embodiment the process of avoiding having a DMA interrupting a large contiguous data file is performed after writing of the large file in the normal way has been finished. The drive could then start shifting data over the medium, thereby generating the result as described above wherein interrupting DMAs are removed. It is noted that this may lead to moving a lot of data over the medium, i.e. copying blocks from the original physical address to a new physical address. An advantage is that the drive could do the contiguous recording process in the background, which prevents a user being disturbed by the process.

15

Figure 8 shows a method of dynamically moving defect management areas. The method controls the recording of the blocks by locating each block at a physical address in a track on a record carrier. Physical addresses in first parts of the track are assigned to at least one user data area and physical addresses in second parts of the track are assigned to defect management areas as shown in Figure 4. In a first step 71 'RECEIVE' a command is received to record a series of blocks having continuous logical addresses, in particular digitally encoded video. In a step 'TRANSLATE' 72 the logical addresses are translated into corresponding physical addresses. For the translation defect management information is retrieved from the record carrier, for example primary defect lists indicating slipped defects as described above. It is noted that the defect management information includes remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area. The process of detecting defects and maintaining the defect management information in the defect management areas is not shown separately in the Figure. In a step 'DETECT DMA' 73 it is detected if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area. If not, the writing of the series is performed in step 'WRITE' 74, and the process complete at 'END' 75. However, if an interrupting DMA is detected in step 'DETECT DMA' 73, the DMA is removed by reallocating the

20

25

30

subset of physical addresses assigned to the DMA to the user data area in step
'REALLOCATE' 75. In a step 'UPDATE DM' the defect management information is
adapted to the removal of the interrupting DMA. Finally in step 'WRITE' 74 the series of
blocks is contiguously recorded extending over the subset of physical addresses now
5 reallocated to user data area. It is noted that various options for accommodating the defect
management information originally assigned to the removed DMA are described with the
device options above.

Although the invention has been explained mainly by embodiments using a
CD-RW defect management system, similar defect management systems used for DVD and
10 BD are suitable for applying movement of DMAs when recording large data files. Also for
the information carrier an optical disc has been described, but other media, such as a
magnetic hard disc, can be used. It is noted, that in this document the word 'comprising' does
not exclude the presence of other elements or steps than those listed and the word 'a' or 'an'
preceding an element does not exclude the presence of a plurality of such elements, that any
15 reference signs do not limit the scope of the claims, that the invention may be implemented
by means of both hardware and software, and that several 'means' may be represented by the
same item of hardware. Further, the scope of the invention is not limited to the embodiments,
and the invention lies in each and every novel feature or combination of features described
above.

CLAIMS:

1. Device for recording information in blocks having logical addresses on a record carrier, which device comprises
 - recording means (22) for recording marks in a track on the record carrier representing the information,
 - 5 - control means (20) for controlling the recording by locating each block at a physical address in the track, physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, the control means comprising
 - addressing means (31) for translating the logical addresses into the physical addresses and
 - 10 vice versa in dependence of defect management information,
 - defect management means (32) for detecting defects and maintaining the defect management information in the defect management areas, the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical
 - 15 address in a defect management area, and
 - contiguous recording means (33)
 - for recording a series of blocks having a continuous logical address range in a corresponding allocated physical address range, in particular digitally encoded video,
 - for detecting if the allocated physical address range is interrupted by a subset of physical
 - 20 addresses assigned to a defect management area,
 - for reallocating the subset of physical addresses to the user data area, and
 - for contiguously recording the series of blocks extending over the subset of physical addresses.
- 25 2. Device as claimed in claim 1, wherein the contiguous recording means (33) are for reallocating said interrupting defect management area to different physical addresses and updating the defect management information correspondingly.

3. Device as claimed in claim 1, wherein the contiguous recording means (33) are for detecting blocks previously remapped to the subset of physical addresses, and, in the event of detecting previously remapped blocks, for remapping the previously remapped blocks.
- 5
4. Device as claimed in claim 3, wherein the device comprises a memory (34) and the contiguous recording means (33) are for, during contiguous recording,
- storing in the memory blocks from the series of blocks corresponding to the previously remapped blocks until after said remapping, or
- 10 - reading the previously remapped blocks into the memory and continue recording the series of blocks extending over the subset, or
- reading the previously remapped blocks, writing them on a free area of the disc and continue recording the series of blocks extending over the subset.
- 15
5. Device as claimed in claim 1, wherein the contiguous recording means (33) are for at least partly removing said interrupting defect management area from the defect management areas.
6. Device as claimed in claim 5, wherein the contiguous recording means (33)
- 20 are for adapting defect management status information indicating that the interrupting defect management area is unusable or adapting pointer information or size information indicating the location or size of the interrupting defect management area.
7. Device as claimed in claim 1, wherein the contiguous recording means (33)
- 25 are for detecting a defect physical address interrupting the allocated physical address range, and creating a defect management area extending over the defect by reassigning the defect physical address to the defect management areas.
8. Device as claimed in claim 1, wherein the contiguous recording means (33)
- 30 are for contiguously recording a previously recorded series of blocks, in particular in a background process.
9. Method of recording information in blocks having logical addresses located at physical addresses in a track on a record carrier,

- the logical addresses corresponding to the physical addresses in dependence of defect management information,
 - physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas,
 - 5 - defects being detected and the defect management information being maintained in the defect management areas, and
 - the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area,
 - 10 - a series of blocks having a continuous logical address range, in particular digitally encoded video, corresponding to an allocated physical address range,
- the method comprising
- detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area,
 - 15 - reallocating the subset of physical addresses to the user data area, and
 - contiguously recording the series of blocks extending over the subset of physical addresses.

10. Computer program product for recording information, which program is operative to cause a processor to perform the method as claimed in claim 9.

1/3

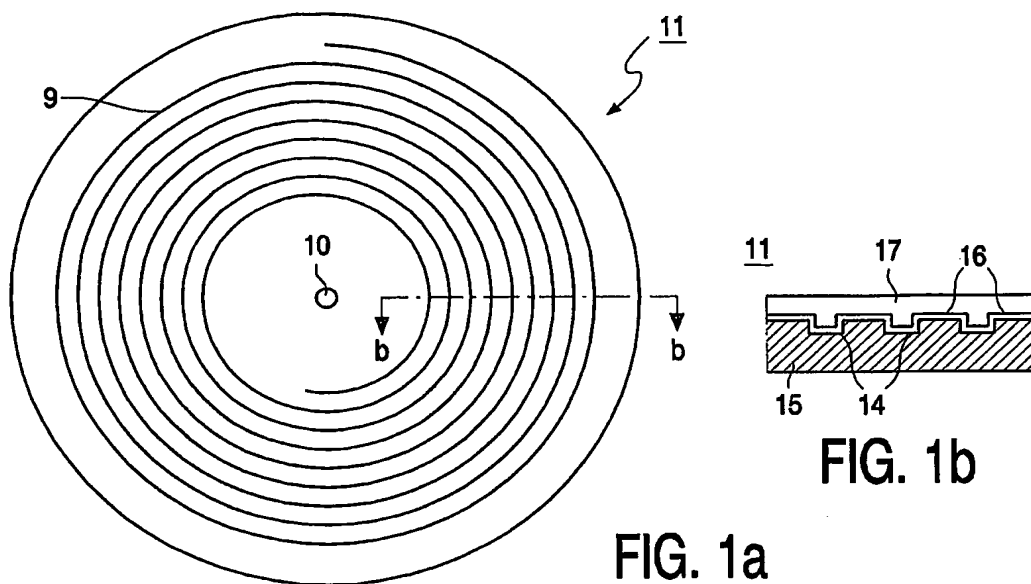


FIG. 1b

FIG. 1a

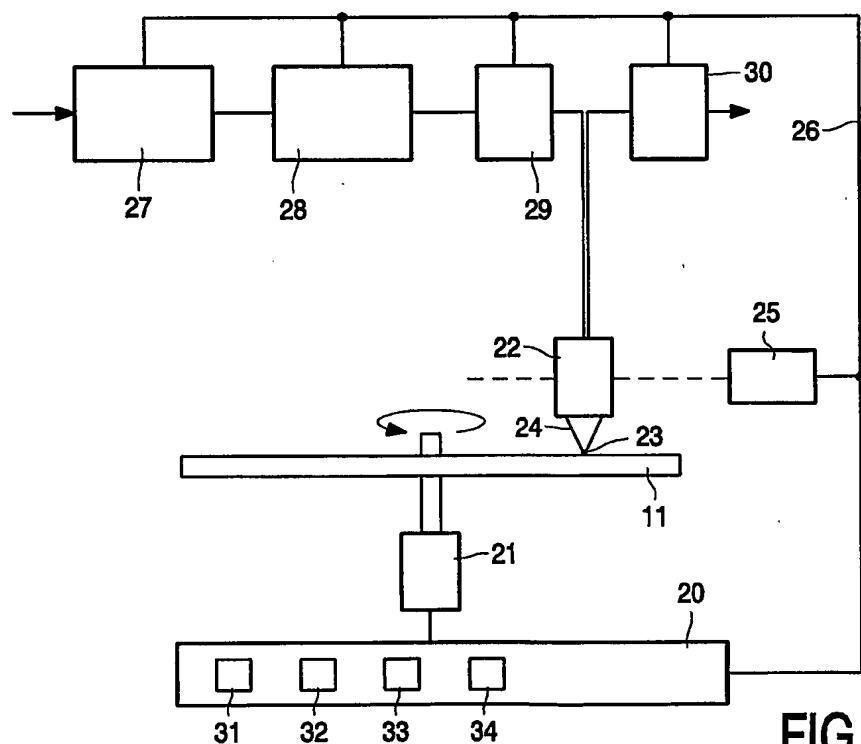


FIG. 2

2/3

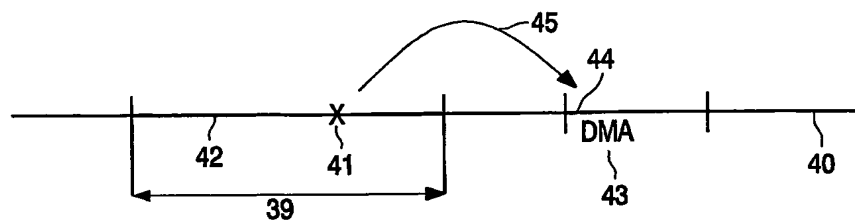


FIG. 3

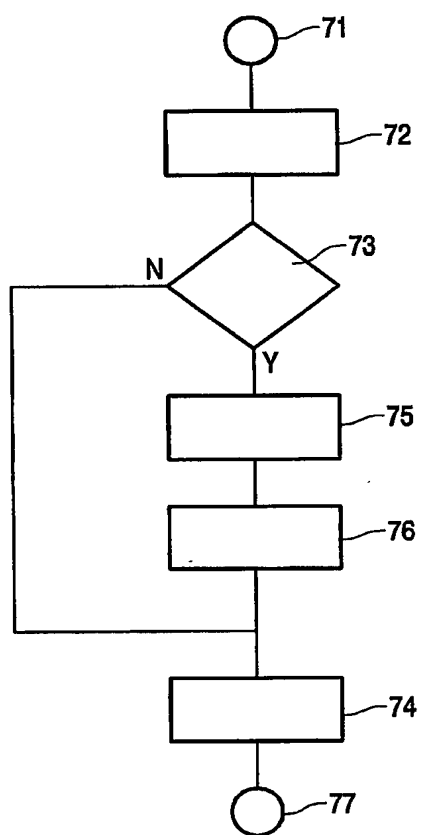


FIG. 8

3/3

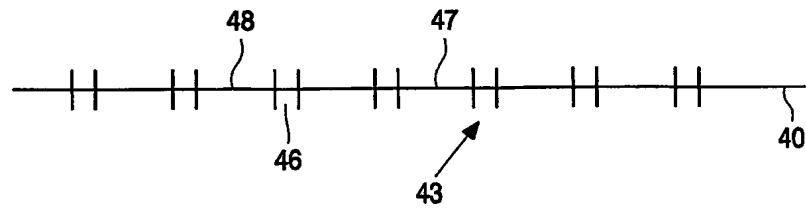


FIG. 4

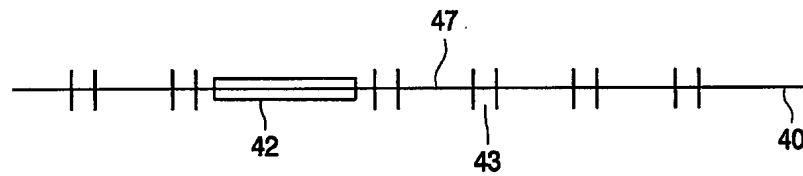


FIG. 5

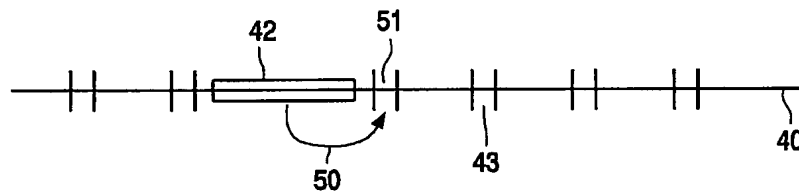


FIG. 6

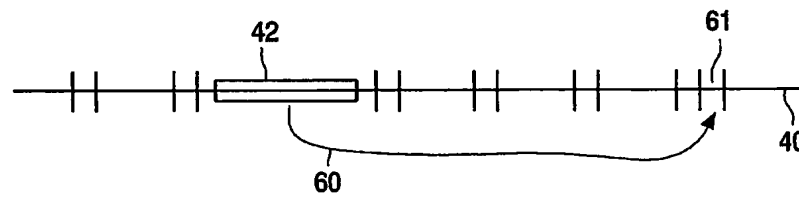


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP2004/050930

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G11B20/12 G11B20/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 120 787 A (TOKYO SHIBAURA ELECTRIC CO) 1 August 2001 (2001-08-01) abstract paragraphs '0492! - '0725! figures 35-81	1-10
A	US 6 279 118 B1 (KANG JUNG-SUK) 21 August 2001 (2001-08-21) the whole document	1,9,10
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) & JP 2001 057028 A (NEC CORP), 27 February 2001 (2001-02-27) abstract	1,9,10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the International search

6 September 2004

Date of mailing of the International search report

10/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sucher, R

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/JP2004/050930

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1120787	A	01-08-2001	JP 3376288 B2	10-02-2003
			JP 2000100078 A	07-04-2000
			JP 2000113643 A	21-04-2000
			JP 3353247 B2	03-12-2002
			JP 2000112672 A	21-04-2000
			JP 3376295 B2	10-02-2003
			JP 2000112673 A	21-04-2000
			JP 3376296 B2	10-02-2003
			JP 2000113602 A	21-04-2000
			JP 3376297 B2	10-02-2003
			JP 2000112674 A	21-04-2000
			EP 1120787 A1	01-08-2001
			US 6609175 B1	19-08-2003
			US 2001020261 A1	06-09-2001
			US 2001018727 A1	30-08-2001
			US 2001044878 A1	22-11-2001
			US 2001034855 A1	25-10-2001
			US 2001029567 A1	11-10-2001
			US 2001020262 A1	06-09-2001
			US 2002035705 A1	21-03-2002
			WO 0017874 A1	30-03-2000
US 6279118	B1	21-08-2001	JP 3135531 B2	19-02-2001
			JP 11296999 A	29-10-1999
JP 2001057028	A	27-02-2001	NONE	

1B 04/50930
14030756



PCT/1B 04/50930
Europäisches
Patentamt
European
Patent Office

Office européen
des brevets

MAILED 23 JUN 2004

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101837.7

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03101837.7
Demande no:

Anmeldetag:
Date of filing: 23.06.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Device and method for recording information

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B20/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Device and method for recording information

The invention relates to a device for recording information in blocks having logical addresses on a record carrier.

The invention further relates to a method of recording information in blocks having logical addresses in a track on a record carrier.

5 The invention further relates to a computer program product for recording information.

The invention relates to the field of defect management in recording systems, and in particular to defect management when recording real-time information such as video.

10

A device and method for recording information on a record carrier are known from US 5,956,309. The apparatus has recording means for recording the information in information blocks having logical addresses on an optical disc in a track at allocated physical addresses. The logical addresses constitute a contiguous storage space. In practice, the record carrier may exhibit defective parts of the track, in particular a defect preventing a block to be recorded at a specific physical address. These defects might be caused by scratches, dust, fingerprints and so on. Initially, before any user data is recorded, defects are detected, and physical addresses of defective sectors are removed from use in a defect table, a process usually called slipping. In the event of defects detected during use of the record carrier, logical addresses assigned to defective physical addresses are assigned to different physical addresses in a defect management area, a process usually called remapping or linear replacement. Remapping introduces a performance penalty as remapping introduces a movement of the recording head (for example an optical pickup unit, OPU), and possibly also a medium rotational speed adjustment and rotational delay(s). Hence defect management areas are located distributed over the total recording area to reduce jumping distances. A problem of the known system is that when a series of blocks is to be recorded that has a large continuous range of logical addresses, the corresponding range of physical addresses may extend over one or more defect management areas. Hence during recording and reproducing

15

20

25

the continuous range of logical addresses the optical head has to jump across the defect management areas.

5 It is an object of the invention to provide a system for contiguously recording and reproducing a series of blocks of digital information, which provides defect management while reducing movements of the head.

 For this purpose, the device as described in the opening paragraph comprises recording means for recording marks in a track on the record carrier representing the
10 information, control means for controlling the recording by locating each block at a physical address in the track, physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, the control means comprising addressing means for translating the logical
15 addresses into the physical addresses and vice versa in dependence of defect management information, defect management means for detecting defects and maintaining the defect management information in the defect management areas, the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area, and contiguous recording means for recording a series
20 of blocks having a continuous logical address range in a corresponding allocated physical address range, in particular digitally encoded video, for detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area, for reallocating the subset of physical addresses to the user data area, and for contiguously recording the series of blocks extending over the subset of physical
25 addresses.

 For this purpose, the method as described in the opening paragraph is for recording information in blocks having logical addresses located at physical addresses in a track on a record carrier, the logical addresses corresponding to the physical addresses in dependence of defect management information, physical addresses in first parts of the track
30 being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, defects being detected and the defect management information being maintained in the defect management areas, and the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate

physical address in a defect management area, a series of blocks having a continuous logical address range, in particular digitally encoded video, corresponding to an allocated physical address range, the method comprising detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area,
5 reallocating the subset of physical addresses to the user data area, and contiguously recording the series of blocks extending over the subset of physical addresses.

The measures have the effect that defect management areas which would interrupt large files of recorded data, are dynamically moved to a different physical address range. This has the advantage that the large files are stored more contiguously and no jumps
10 are required to skip defect management areas.

The invention is also based on the following recognition. Optical media in general have quite a reasonable data-rate, but the access performance (jumping over the disc) is rather limited. Hence for writing a file to the medium as fast as possible (and reading the same file later on) it is preferred to write (read) the file physically contiguous to the medium.
15 An application accessing the record carrier via a usual (host) interface can only influence logical addresses of the medium to which blocks of the file should be written. In order to get a large file as fast as possible to a medium the application may assign a large continuous logical address space. In the recording device (drive) the continuous logical address space is mapped on the physical address space of the medium. In general this mapping is rather
20 straight forward (e.g. something like a 1-to-1 mapping), but defects and defect management areas will interrupt the allocated physical address range. Defects necessarily have to be accommodated by the defect management system. The inventors have seen that for such contiguous recording the defect management areas itself can be removed from the allocated physical address range, obviating the need to jump across defect management areas.

25 In an embodiment of the device the contiguous recording means are for reallocating said interrupting defect management area to different physical addresses and updating the defect management information correspondingly. The interrupting defect management area is moved to a new location, e.g. shifted forward to the end of the contiguously recorded file or to the end of the medium. This has the advantage that the total
30 available defect management areas are not changed, and the file system accessing the medium via the recording device does not need to be informed of any changed data.

In an embodiment of the device the contiguous recording means are for at least partly removing said interrupting defect management area from the defect management areas. This has the advantage that more storage space becomes available for recording user data.

For example the defect management system may initially assign a relatively large amount of physical addresses to defect management areas to accommodate a worst case medium, while during use the medium proves to have only average or less than average defects.

Further embodiments are given in the dependent claims.

5

These and other aspects of the invention will be apparent from and elucidated further with reference to the embodiments described by way of example in the following description and with reference to the accompanying drawings, in which

Figure 1a shows a record carrier (top view),
10 Figure 1b shows a record carrier (cross section),
Figure 2 shows a recording device,
Figure 3 shows remapping of defective locations,
Figure 4 shows distributed defect management areas,
Figure 5 shows contiguous recording,
15 Figure 6 shows shifting a defect management area,
Figure 7 shows shifting a defect management area to the end of the medium,
and

Figure 8 shows a method of dynamically moving defect management areas.
Corresponding elements in different Figures have identical reference
20 numerals.

Figure 1a shows a disc-shaped record carrier 11 having a track 9 and a central
hole 10. The track 9, being the position of the series of (to be) recorded marks representing
25 information, is arranged in accordance with a spiral pattern of turns constituting substantially
parallel tracks on an information layer. The record carrier may be optically readable, called
an optical disc, and has an information layer of a recordable type. Examples of a recordable
disc are the CD-R and CD-RW, and writable versions of DVD, such as DVD+RW, and the
high density writable optical disc using blue lasers, called Blu-ray Disc (BD). Further details
30 about the DVD disc can be found in reference: *ECMA-267: 120 mm DVD – Read-Only Disc -
(1997)*. The information is represented on the information layer by recording optically
detectable marks along the track, e.g. crystalline or amorphous marks in phase change
material. The track 9 on the recordable type of record carrier is indicated by a pre-embossed
track structure provided during manufacture of the blank record carrier. The track structure is

constituted, for example, by a pregroove 14 which enables a read/write head to follow the track during scanning. The track structure comprises position information including so-called physical addresses, for indicating the location of units of information, usually called information blocks. The position information includes specific synchronizing marks for
5 locating the start of such information blocks.

Figure 1b is a cross-section taken along the line b-b of the record carrier 11 of the recordable type, in which a transparent substrate 15 is provided with a recording layer 16 and a protective layer 17. The protective layer 17 may comprise a further substrate layer, for example as in DVD where the recording layer is at a 0.6 mm substrate and a further substrate
10 of 0.6 mm is bonded to the back side thereof. The pregroove 14 may be implemented as an indentation or an elevation of the substrate 15 material, or as a material property deviating from its surroundings.

The record carrier 11 is intended for carrying digital information in blocks under control of a file management system, the information including real-time information
15 to be recorded and reproduced continuously, in particular information representing digitally encoded video according to a standardized format like MPEG2.

Figure 2 shows a recording device for writing information on a record carrier 11 of a type which is writable or re-writable, for example CD-R or CD-RW, or DVD+RW or BD. The device is provided with recording means for scanning the track on the record carrier
20 which means include a drive unit 21 for rotating the record carrier 11, a head 22, a positioning unit 25 for coarsely positioning the head 22 in the radial direction on the track, and a control unit 20. The head 22 comprises an optical system of a known type for generating a radiation beam 24 guided through optical elements focused to a radiation spot 23 on a track of the information layer of the record carrier. The radiation beam 24 is generated
25 by a radiation source, e.g. a laser diode. The head further comprises (not shown) a focusing actuator for moving the focus of the radiation beam 24 along the optical axis of said beam and a tracking actuator for fine positioning the spot 23 in a radial direction on the center of the track. The tracking actuator may comprise coils for radially moving an optical element or may alternatively be arranged for changing the angle of a reflecting element. For writing
30 information the radiation is controlled to create optically detectable marks in the recording layer. The marks may be in any optically readable form, e.g. in the form of areas with a reflection coefficient different from their surroundings, obtained when recording in materials such as dye, alloy or phase change material, or in the form of areas with a direction of magnetization different from their surroundings, obtained when recording in magneto-optical

material. For reading the radiation reflected by the information layer is detected by a detector of a usual type, e.g. a four-quadrant diode, in the head 22 for generating a read signal and further detector signals including a tracking error and a focusing error signal for controlling said tracking and focusing actuators. The read signal is processed by read processing unit 30 of a usual type including a demodulator, deformatter and output unit to retrieve the information. Hence retrieving means for reading information include the drive unit 21, the head 22, the positioning unit 25 and the read processing unit 30. The device comprises write processing means for processing the input information to generate a write signal to drive the head 22, which means comprise an input unit 27, and modulator means comprising a formatter 28 and a modulator 29. During the writing operation, marks representing the information are formed on the record carrier. The marks are formed by means of the spot 23 generated on the recording layer via the beam 24 of electromagnetic radiation, usually from a laser diode. Writing and reading of information for recording on optical disks and formatting, error correcting and channel coding rules are well-known in the art, e.g. from the CD and DVD system.

The control unit 20 is connected via control lines 26, e.g. a system bus, to said input unit 27, formatter 28 and modulator 29, to the read processing unit 30, and to the drive unit 21, and the positioning unit 25. The control unit 20 comprises control circuitry, for example a microprocessor, a program memory and control gates, for performing the procedures and functions according to the invention as described below. The control unit 20 may also be implemented as a state machine in logic circuits. The control unit 20 controls the recording and retrieving of information and may be arranged for receiving commands from a user or from a host computer.

The input unit 27 processes the audio and/or video to units of information, which are passed to the formatter 28 for adding control data and formatting the data as information blocks according to a predefined recording format, e.g. by adding error correction codes (ECC) and/or interleaving. For computer applications units of information may be interfaced to the formatter 28 directly. The formatted data from the output of the formatter 28 is passed to the modulation unit 29, which comprises for example a channel coder, for generating a modulated signal which drives the head 22. Further the modulation unit 29 comprises synchronizing means for including synchronizing patterns in the modulated signal. The formatted units presented to the input of the modulation unit 29 comprise address information and are written to corresponding addressable locations on the

record carrier under the control of control unit 20, and for performing defect management as described below.

In an embodiment the input unit 27 is arranged for receiving real-time information. The input unit may comprise compression means for input signals such as analog audio and/or video, or digital uncompressed audio/video. Suitable compression means are described for audio in WO 98/16014-A1 (PHN 16452), and for video in the MPEG2 standard. The input signal may alternatively be already digitally encoded.

The control unit 20 is arranged for controlling the recording by locating each block at a physical address in the track, and includes the following cooperating units: an addressing unit 31, a defect management unit 32, a contiguous recording unit 33, and (optionally) a memory 34.

The addressing unit 31 is for translating physical addresses into logical addresses and vice versa in dependence of defect management information. The logical addresses constitute a contiguous storage space to be used for storing files of information blocks under control of a file management system, for example UDF. The defect management unit 32 detects defects, for example by monitoring the signal quality of a read-out signal from the head 22 during recording and/or reading. The defects may also be detected by determining an error rate in retrieved information blocks. The defect management unit further maintains the defect management information in defect management areas on the record carrier, for example in defect lists as defined for the DVD recordable systems like DVD+RW. The defect management information at least includes remapping information.

In an embodiment the recording device is arranged as a drive unit to be connected to a separate host system, for example a drive unit to be build in a PC. The control unit 20 is arranged to communicate with a processing unit in the host system via a standardized interface. Alternatively the recording drive is arranged as a stand alone unit, for example a video recording apparatus for consumer use. The control unit 20, or an additional host control unit included in the device, is arranged to be controlled directly by the user, and to also perform the functions of the file management system.

Figure 3 shows remapping of defective locations. A physical address space 40 is schematically represented by a horizontal line. A series of blocks 42 is to be recorded in an allocated physical address range 39. However a defect 41 interrupts the allocated physical address range. Remapping 45 is the process that a block 44 having a logical address corresponding to the physical address 41 that is defective is stored in an alternative physical

address in a defect management spare area (DMA) 43. The remapping information provides data for translating the logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area, for example an entry in a secondary defect list including the logical address of the remapped block and its
5 corresponding physical address. Alternatively remapping information may include data for translation of a physical address of a defect to a different physical address in a defect management area.

The contiguous recording unit 33 in Figure 2 performs the following functions. First it is detected that a series of blocks having a continuous logical address range is to be recorded in a corresponding allocated physical address range. In general contiguous
10 recording is required for real-time information which has a relative high data rate, in particular video information. The type of data may be included in the writing commands received by the control unit, for example a write command from a host computer including a real-time bit. The detection of contiguous recording may also be based on the amount of data
15 blocks indicated in a write command, or by other aspects such as the fact that new blocks having logical addresses consecutive to the last written block arrive at regular intervals.

Figure 4 shows distributed defect management areas. A physical address space
40 is schematically represented by a horizontal line. First parts of the physical address space are assigned to defect management areas (DMA) 43,46 and second parts of the physical address space are assigned to user data areas 47,48, i.e. are assigned to logical addresses available for storing user data. An example is the Mount Rainier defect management as defined for CD-MRW. A description of Mount Rainier and CD-MRW is available from Philips on <http://www.licensing.philips.com/information/mtr/>. In the logical space of the
20 medium the DMAs are not visible. This means that if a large file is written to disc even if the entire file has continuous logical addresses, there will be DMAs included in the physical address allocated to the file. These DMAs in the middle of such a data file harm the performance of writing and consequent reading back of the file, as there are a number of jumps introduced when the entire file is written (retrieved) due to the jumping over the DMAs. The solution is to move the interrupting DMA to different physical addresses. As a
25 result the large files are contiguous not only logically, but also physically on the medium.

Figure 5 shows contiguous recording. The physical address space is as shown in Figure 4. A series of blocks 42 constituting (part of) a large file is recorded starting in the user data area 48. However the series of blocks extends over the defect management area 46. The defect management area 46 covers a subset of physical addresses, which defect

management area is removed from the defect management areas. The subset of physical addresses originally assigned to the removed defect management area 46 are reallocated to user data area, and used for continuing the recording of the series of blocks 42.

5 Figure 6 shows shifting a defect management area. The physical address space and contiguously recorded data are as shown in Figure 5. The interrupting defect management area 46 has been shifted to a new location 51, as indicated by arrow 50. The new location 51 is constituted by physical address before the next defect management area. Hence the translation of logical addresses to physical addresses is unaffected after the next defect management area.

10 Figure 7 shows shifting a defect management area to the end of the medium. The physical address space and contiguously recorded data are as shown in Figure 5. The interrupting defect management area 46 has been shifted to a new location 61, as indicated by arrow 60. The new location 61 is constituted by physical address at the end of the medium, for example the last part of the last user data area. Effectively, when during the writing of a
15 large file a DMA is reached, this DMA is shifted forward towards the end of the medium. The translation of logical addresses to physical addresses has to be adapted accordingly.

For relocating or removing a DMA it is required that any blocks already remapped and stored in that DMA are moved to a new location. When the DMA is still
20 empty there is no problem and only the information about the location of this DMA needs to be updated. For example a pointer to the removed DMA has to be updated, or the status or size indicator for that DMA is changed to indicate that no space is available or space is available at a new physical address. If the location of the DMAs is not stored as a pointer somewhere on disc, but hard linked to a certain format, the location of the DMAs can't be changed. The solution is then to disable a certain DMA completely by making all entries in
25 that particular DMA unusable. In most practical defect management systems the location of the DMAs is stored as a pointer somewhere on disc. For example for CD-MRW pointers and sizes of DMAs are stored in the MTA (Main Table Area), which consists of a MIP (Main Information Packet) and a MDT (Main Defect Table). The location pointer and possibly the size of the DMA have to be updated.

30 In an embodiment the device is provided with a memory 34, for example a cache coupled to the control unit 20. When the DMA that is to be removed is not empty (for example there are already replacements made to that DMA) there are inter alia the following three options.

(1) Keep the data that has to be written to the location of the interrupting DMA for the time being in the cache. This data is written to disc at a later stage, e.g. in a background process active when no new real time data has to be recorded.

(2) Read the data blocks of the interrupting DMA in cache and continue to write the new data (also extending over the 'old' DMA location). Of course the data of the DMA has to be written to disc after the write action is finished.

(3) Use a piece of empty disc to store the amount of real-time data equal to the DMA size temporarily somewhere else. After the real-time operation is finished put the information that was at the DMA location at a new location, and finally retrieve the amount of data equal to the DMA from its temporary location and store it at the correct location. In an embodiment for drives that have no File System knowledge the temporary location could be an empty part of another DMA. Alternatively, if File System knowledge is available in the device, a free area could be (temporarily) allocated via the file system.

In an embodiment in either of the above options the device first detects which of the physical addresses in the DMA actually contain defect management information and need to be remapped. Temporarily storing and/or postponement of writing are applied only for the physical addresses that actually contain defect management data.

It is noted that the first option requires additional cache memory; the second option also requires additional cache memory and one small additional jump (over the size of a DMA); the third option doesn't need additional cache memory to store data in for a longer period of time, but does introduce two larger jumps (to and back from the free location). However, writing in any of these situations will typically not take any longer than it would have taken when the invention is not applied. The advantage of each of the options can be found in the increased performance when the large file is read back again. As reading a file is typically performed more often than writing that same file, the invention has a clear performance advantage.

In an embodiment the defect management system is adapted. If there are defects in the physical address range that is allocated to the contiguous series of blocks, the writing of the series is interrupted at the defect but continued immediately after the defect, effectively skipping the defective physical addresses. Logical addresses are assigned continuously by 'slipping' the defect. At the end of the file, the file doesn't fit in the allocated physical address range anymore (due to the 'slipped' defective addresses). The remainder of the file should be written at a free location on the medium. Preferably this is directly after the allocated physical address range, but it can be at any other free area at the cost of one extra

access. In an embodiment physical addresses containing defects detected interrupting the allocated physical address range are marked as being unusable, e.g. defect or already taken.

In fact the defects may, at least partly, take the required space from the originally removed DMA. Hence no additional space is used from the user data area. Of course any previously

5 remapped blocks in the removed DMA still need to be accommodated as described above.

Another solution could be to apply 'slipping' as described above and to get the extra-required space from the next DMA. This means that all data between the assigned area for the file and the next DMA has to be shifted over a distance corresponding to the number of defects that is in the allocated physical address range.

10 In an embodiment the process of avoiding having a DMA interrupting a large contiguous data file is performed after writing of the large file in the normal way has been finished. The drive could then start shifting data over the medium, thereby generating the result as described above wherein interrupting DMAs are removed. It is noted that this may lead to moving a lot of data over the medium, i.e. copying blocks from the original physical
15 address to a new physical address. An advantage is that the drive could do the contiguous recording process in the background, which prevents a user being disturbed by the process.

Figure 8 shows a method of dynamically moving defect management areas. The method controls the recording of the blocks by locating each block at a physical address in a track on a record carrier. Physical addresses in first parts of the track are assigned to at
20 least one user data area and physical addresses in second parts of the track are assigned to defect management areas as shown in Figure 4. In a first step 71 'RECEIVE' a command is received to record a series of blocks having continuous logical addresses, in particular digitally encoded video. In a step 'TRANSLATE' 72 the logical addresses are translated into corresponding physical addresses. For the translation defect management information is
25 retrieved from the record carrier, for example primary defect lists indicating slipped defects as described above. It is noted that the defect management information includes remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area. The process of detecting defects and maintaining the defect management information in the defect
30 management areas is not shown separately in the Figure. In a step 'DETECT DMA' 73 it is detected if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area. If not, the writing of the series is performed in step 'WRITE' 74, and the process complete at 'END' 75. However, if an interrupting DMA is detected in step 'DETECT DMA' 73, the DMA is removed by reallocating the

subset of physical addresses assigned to the DMA to the user data area in step
'REALLOCATE' 75. In a step 'UPDATE DM' the defect management information is
adapted to the removal of the interrupting DMA. Finally in step 'WRITE' 74 the series of
blocks is contiguously recorded extending over the subset of physical addresses now
5 reallocated to user data area. It is noted that various options for accommodating the defect
management information originally assigned to the removed DMA are described with the
device options above.

Although the invention has been explained mainly by embodiments using a
CD-RW defect management system, similar defect management systems used for DVD and
10 BD are suitable for applying movement of DMAs when recording large data files. Also for
the information carrier an optical disc has been described, but other media, such as a
magnetic hard disc, can be used. It is noted, that in this document the word 'comprising' does
not exclude the presence of other elements or steps than those listed and the word 'a' or 'an'
preceding an element does not exclude the presence of a plurality of such elements, that any
15 reference signs do not limit the scope of the claims, that the invention may be implemented
by means of both hardware and software, and that several 'means' may be represented by the
same item of hardware. Further, the scope of the invention is not limited to the embodiments,
and the invention lies in each and every novel feature or combination of features described
above.

CLAIMS:

1. Device for recording information in blocks having logical addresses on a record carrier, which device comprises
 - recording means (22) for recording marks in a track on the record carrier representing the information,
 - 5 - control means (20) for controlling the recording by locating each block at a physical address in the track, physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas, the control means comprising
 - addressing means (31) for translating the logical addresses into the physical addresses and
 - 10 vice versa in dependence of defect management information,
 - defect management means (32) for detecting defects and maintaining the defect management information in the defect management areas, the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical
 - 15 address in a defect management area, and
 - contiguous recording means (33)
 - for recording a series of blocks having a continuous logical address range in a corresponding allocated physical address range, in particular digitally encoded video,
 - for detecting if the allocated physical address range is interrupted by a subset of physical
 - 20 addresses assigned to a defect management area,
 - for reallocating the subset of physical addresses to the user data area, and
 - for contiguously recording the series of blocks extending over the subset of physical addresses.
- 25 2. Device as claimed in claim 1, wherein the contiguous recording means (33) are for reallocating said interrupting defect management area to different physical addresses and updating the defect management information correspondingly.

3. Device as claimed in claim 1, wherein the contiguous recording means (33) are for detecting blocks previously remapped to the subset of physical addresses, and, in the event of detecting previously remapped blocks, for remapping the previously remapped blocks.

5

4. Device as claimed in claim 3, wherein the device comprises a memory (34) and the contiguous recording means (33) are for, during contiguous recording,

- storing in the memory blocks from the series of blocks corresponding to the previously remapped blocks until after said remapping, or

10 - reading the previously remapped blocks into the memory and continue recording the series of blocks extending over the subset, or

- reading the previously remapped blocks, writing them on a free area of the disc and continue recording the series of blocks extending over the subset.

15 5. Device as claimed in claim 1, wherein the contiguous recording means (33) are for at least partly removing said interrupting defect management area from the defect management areas.

20 6. Device as claimed in claim 5, wherein the contiguous recording means (33) are for adapting defect management status information indicating that the interrupting defect management area is unusable or adapting pointer information or size information indicating the location or size of the interrupting defect management area.

25 7. Device as claimed in claim 1, wherein the contiguous recording means (33) are for detecting a defect physical address interrupting the allocated physical address range, and creating a defect management area extending over the defect by reassigning the defect physical address to the defect management areas.

30 8. Device as claimed in claim 1, wherein the contiguous recording means (33) are for contiguously recording a previously recorded series of blocks, in particular in a background process.

9. Method of recording information in blocks having logical addresses located at physical addresses in a track on a record carrier,

- the logical addresses corresponding to the physical addresses in dependence of defect management information,
- physical addresses in first parts of the track being assigned to at least one user data area and physical addresses in second parts of the track being assigned to defect management areas,
- 5 - defects being detected and the defect management information being maintained in the defect management areas, and
- the defect management information at least including remapping information indicative for translating a logical address initially mapped to a physical address exhibiting a defect to an alternate physical address in a defect management area,
- 10 - a series of blocks having a continuous logical address range, in particular digitally encoded video, corresponding to an allocated physical address range,
- the method comprising
- detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area,
- 15 - reallocating the subset of physical addresses to the user data area, and
- contiguously recording the series of blocks extending over the subset of physical addresses.

10. Computer program product for recording information, which program is operative to cause a processor to perform the method as claimed in claim 9.

ABSTRACT:

A device for recording records a series of blocks (42) having continuous logical addresses, e.g. digitally encoded video, on a record carrier at a corresponding physical address range. Some physical addresses are assigned to defect management areas (43). The logical addresses are translated into the physical addresses in dependence of the defect management information. The device has contiguous recording means for detecting if the allocated physical address range is interrupted by a subset of physical addresses assigned to a defect management area. If so, the subset of physical addresses is reallocated to the user data area. The series of blocks (42) is contiguously recorded extending over the subset of physical addresses. The defect management area may be eliminated, shifted to a new location (51) after the end of the recorded file or shifted to the end of the medium.

Figure 6

1/3

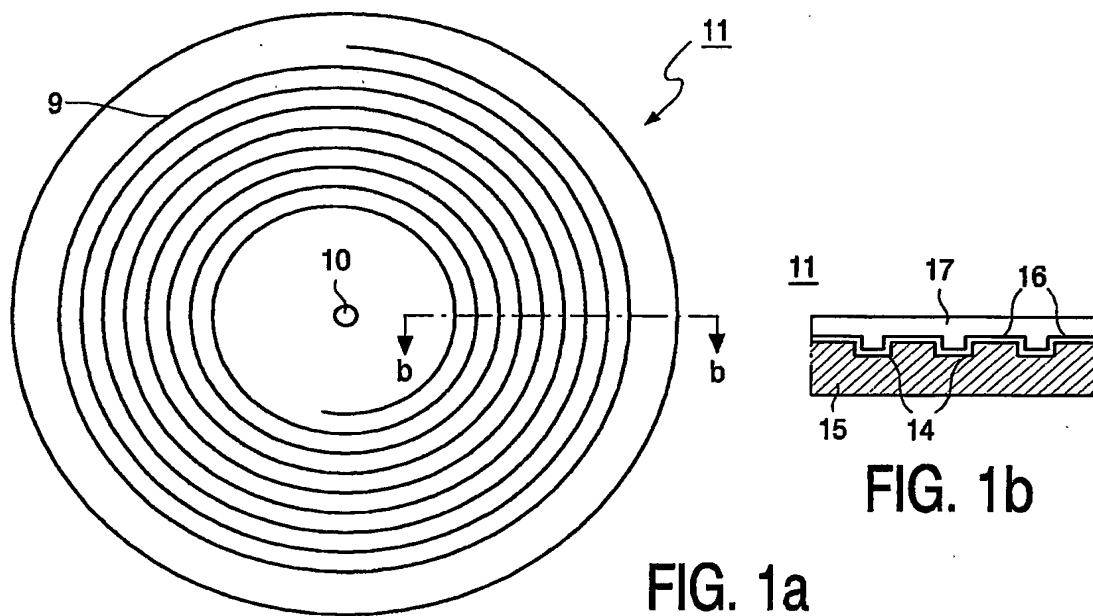


FIG. 1b

FIG. 1a

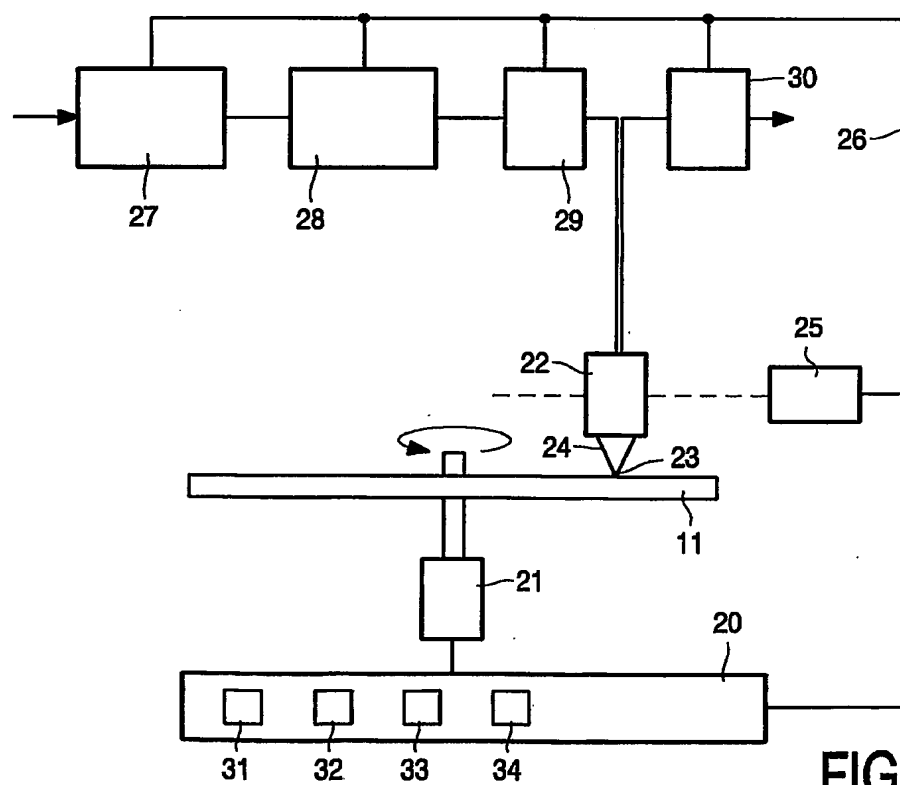


FIG. 2

2/3

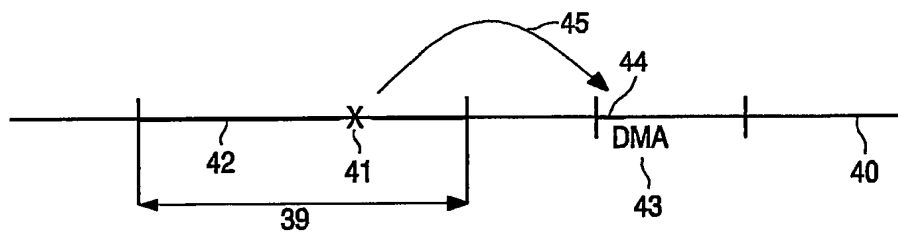


FIG. 3

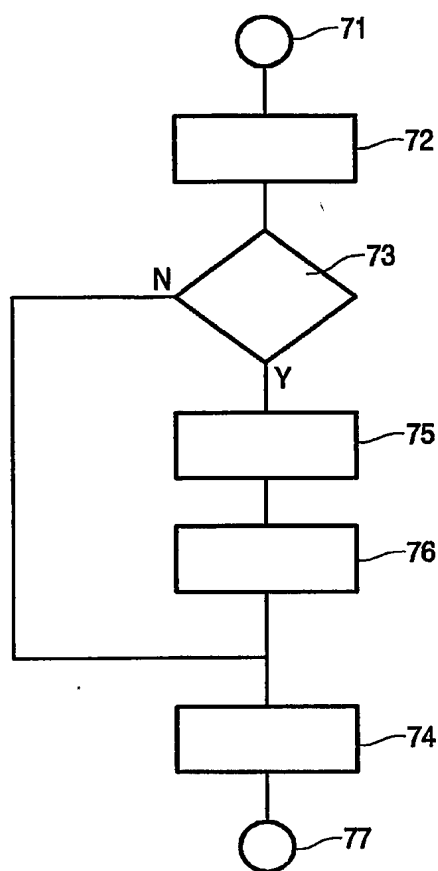


FIG. 8

3/3

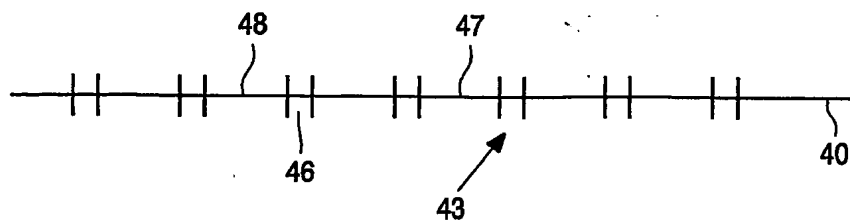


FIG. 4

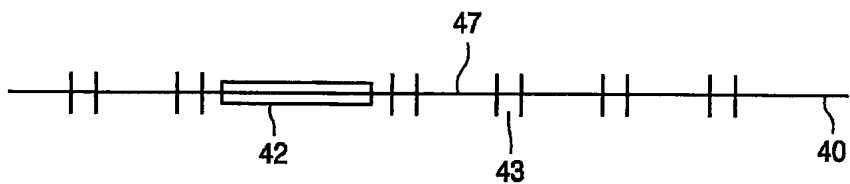


FIG. 5

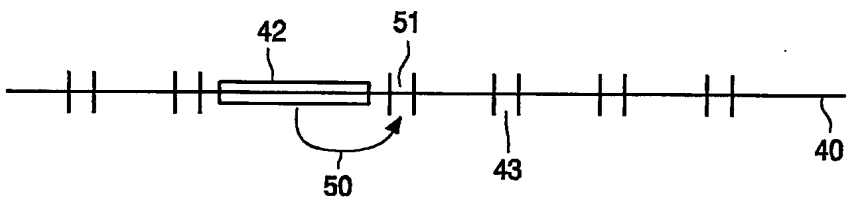


FIG. 6

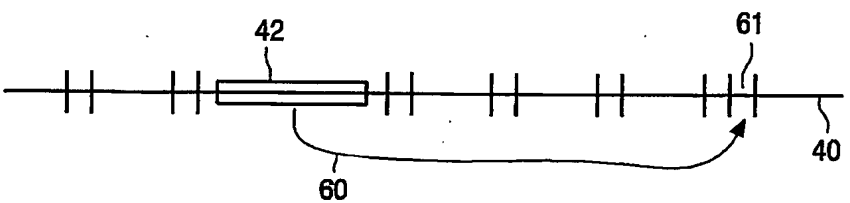


FIG. 7